


1. Download the software and the drivers

<https://yadi.sk/d/mDBKWins3Mg3Qe>

2. Install the driver


Before install driver, please do not connect USB watchdog with your computer, double-click "Watchdog Driver. exe", click "Install", waiting for the installation is complete.

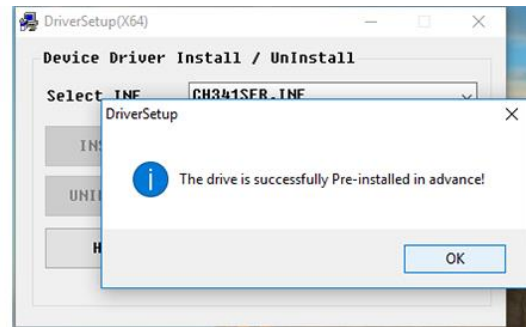

3. Connect USB Watchdog to computer USB port.

Connect Watchdog to computer USB port. Do not connect cable with the motherboard reset pin temporarily, because default time-out time is 3 minutes, if drive installment has not finished within 3 minutes, the USB Watchdog may send a reboot signal to system. Wait for the computer to finish the automatic recognition of the watchdog module.

4. Connect the cable with the motherboards reset pin

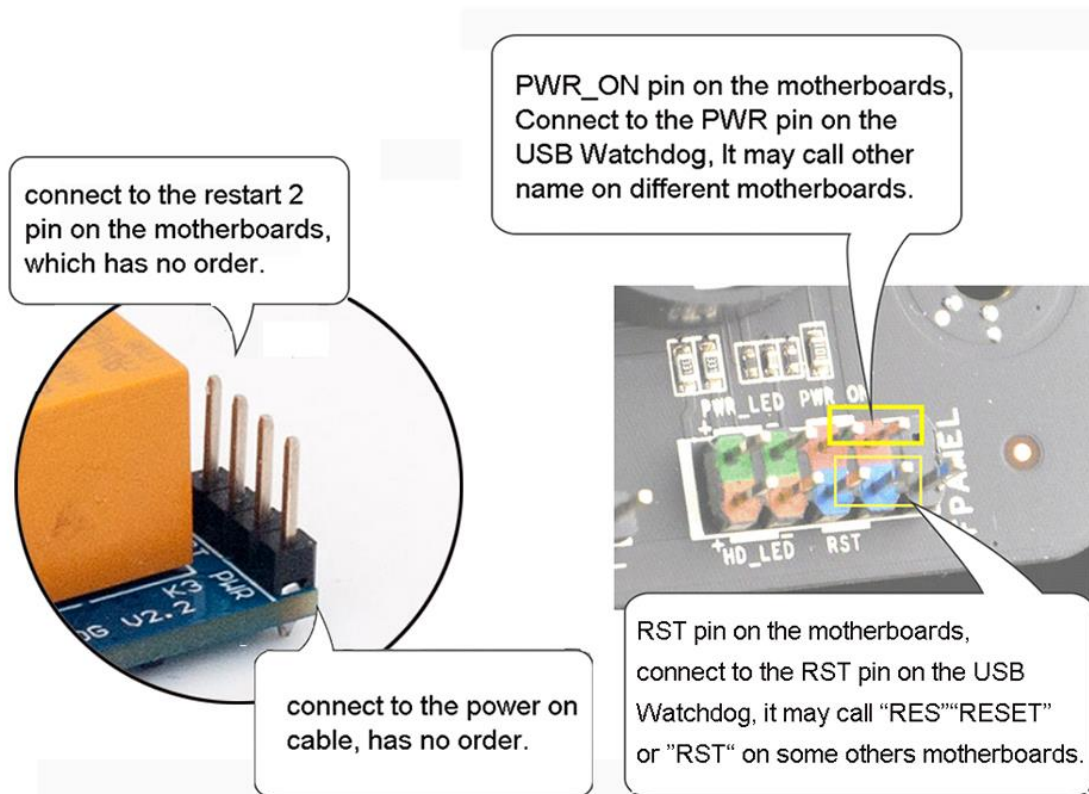

5. if you want to fix the Setting, you can open the config.inf to fix.

timeout=180;//Timeout reset time can only be 10 integers, range 10-1270 seconds

TimedRestartDays=3;//Auto restart days

HttpName=;//the link which you want to watch,it will not watch if you do not fill in,such as pool.ethfans.org

AppName=;//the app you want to watch

VideoCardMonitor=1;//Do you want to watch the video card?0 not watch,1 watch

6. start the Software.

start the USBWatchdog_V2.3x_en and configure as your need.

Advise you reboot the USBWatchdog software after you changed configure.

